




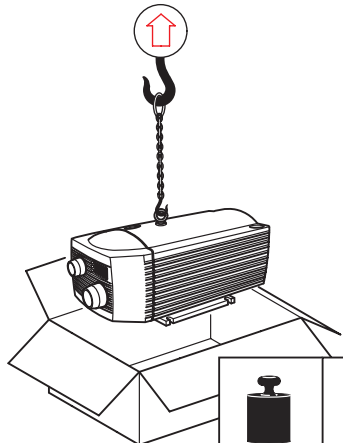
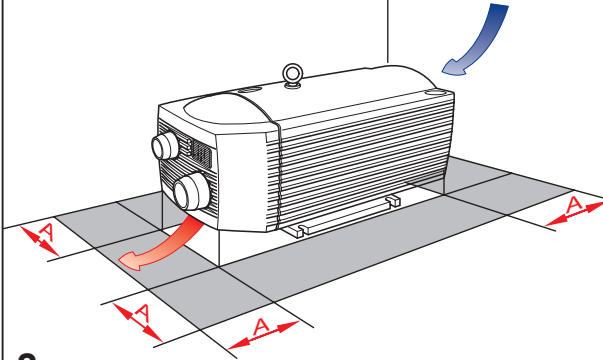








Betriebsanleitung
Operating Instructions
Instructions de service
Istruzioni d'uso
Handleiding
Instrucciones para el manejo
Manual de instruções
Naudojimosi instrukcija
Kasutusjuhend
Lietošanas instrukcija
Driftsinstruks
Driftsinstruktioner
Käyttöohje
Driftsvejledning
Instrukcja obsługi







Kezelési útmutató
Návod k obsluze
Navodilo za uporabo
Návod na obsluhu
Upute za rad
Manual de operatii
Treoracha Oibriúcháin
Οδηγίες χρήσης
El Kitabi
Инструкции за експлоатация
Инструкция по эксплуатации
取扱説明書
사용설명서
使用说明书



 	 		MAX. PRESSURE MAX. VACUUM	 mbar
 AIR	   		 MAX.	 m³/h
			DIN EN ISO 2151 DIN EN ISO 3744	$L_{pA} = 69 \text{ dB(A)} - 50\text{Hz}$ $L_{pA} = 70 \text{ dB(A)} - 60\text{Hz}$ $K_{pA} = 3 \text{ dB(A)}$


			
	1  35,0 kg 77,2 lbs		



A > 100mm A > 4"	 > 5°C/41°F < 45°C/113°F	 max. 90%	 max. 800m
			
2			

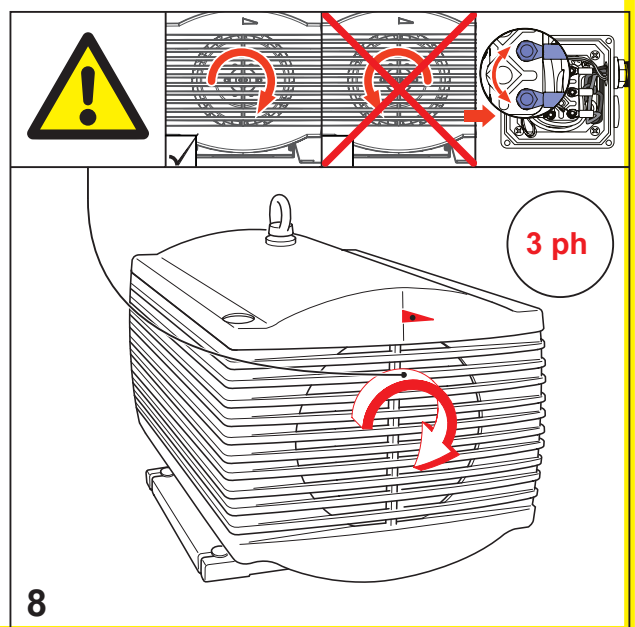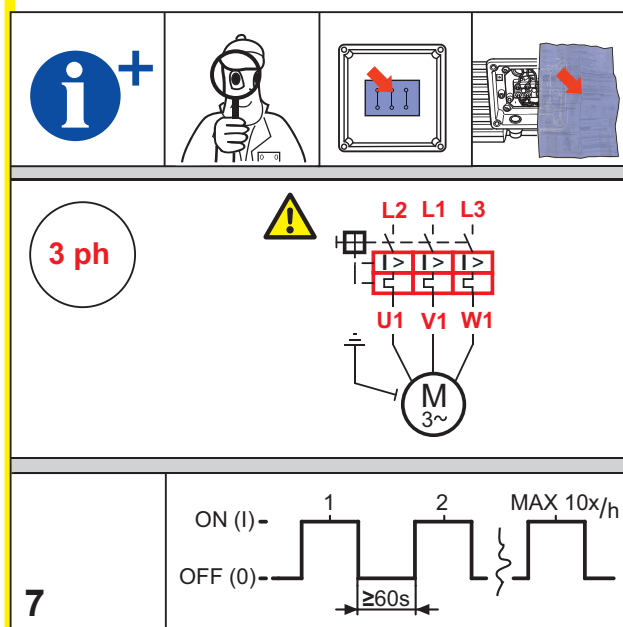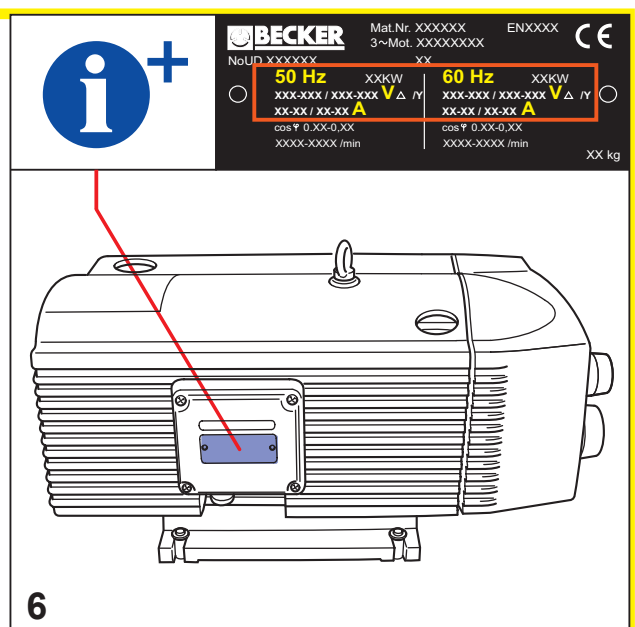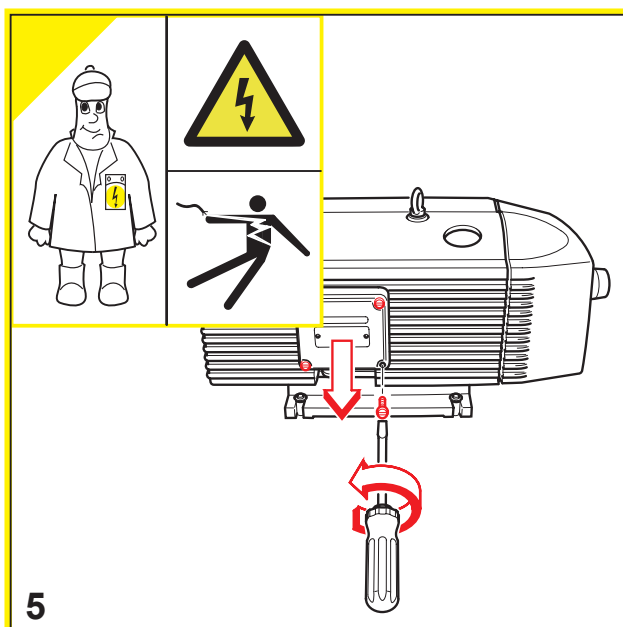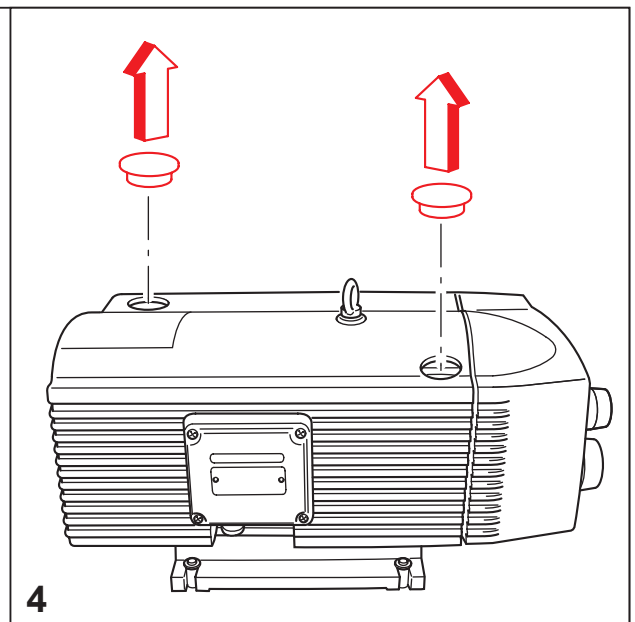
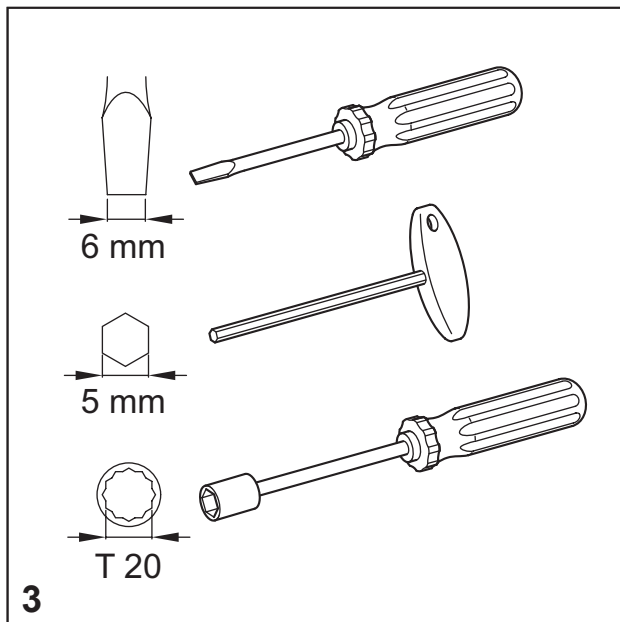


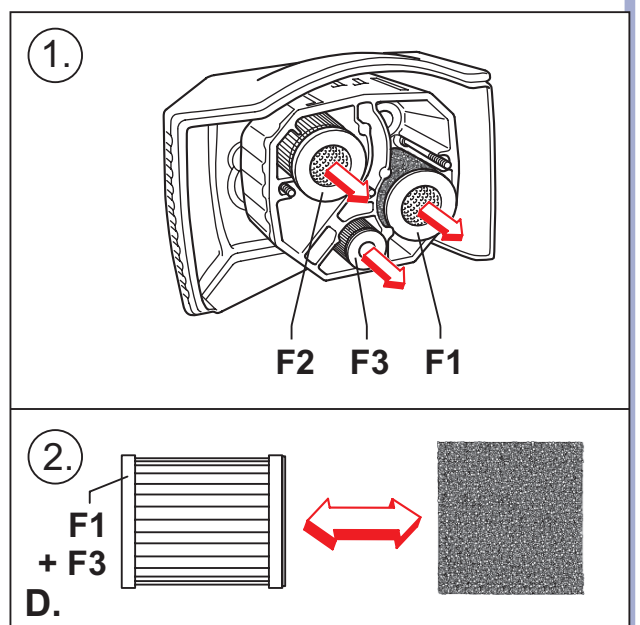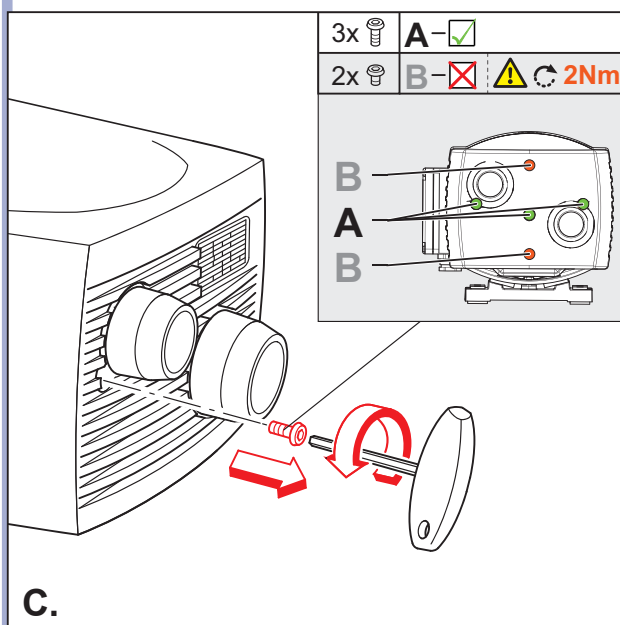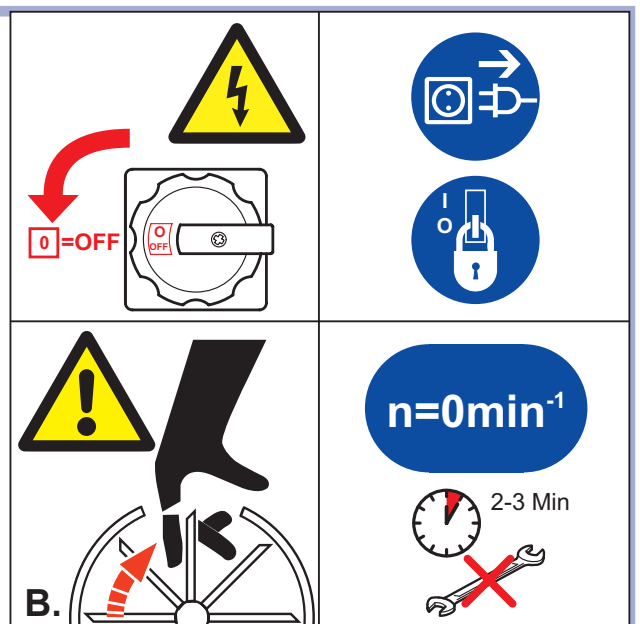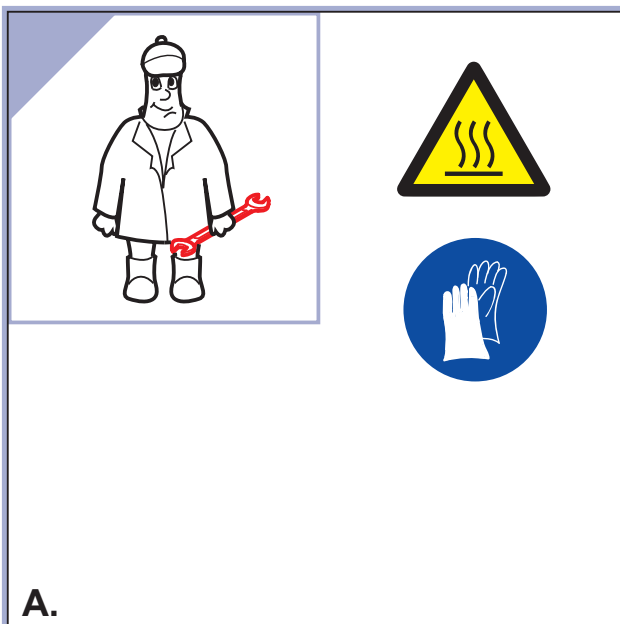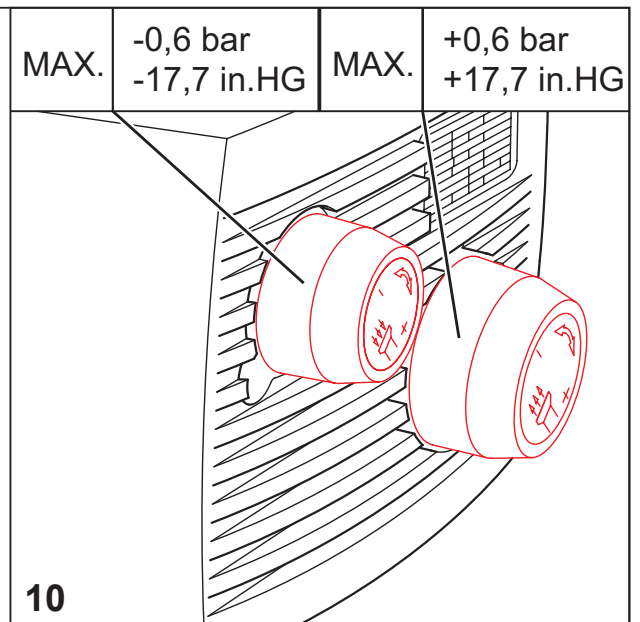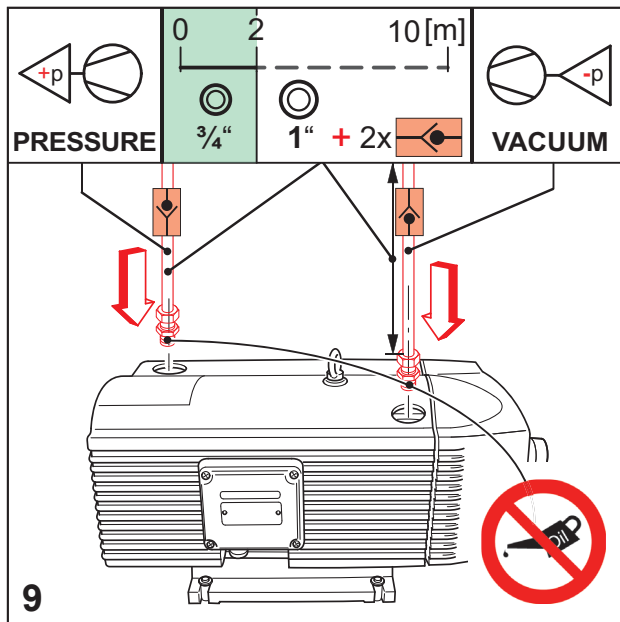

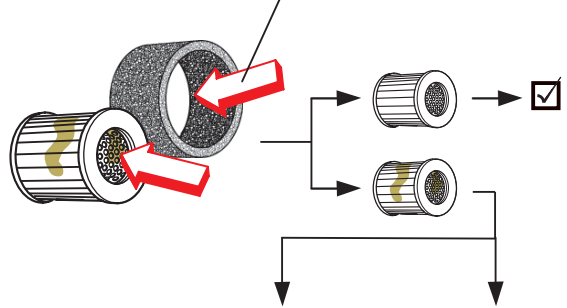		
		
F1 D: 64 mm H: 70 mm No.: 90950501	F2 D: 64 mm H: 60 mm No.: 909529	F3 D: 38 mm H: 38 mm No.: 90951801

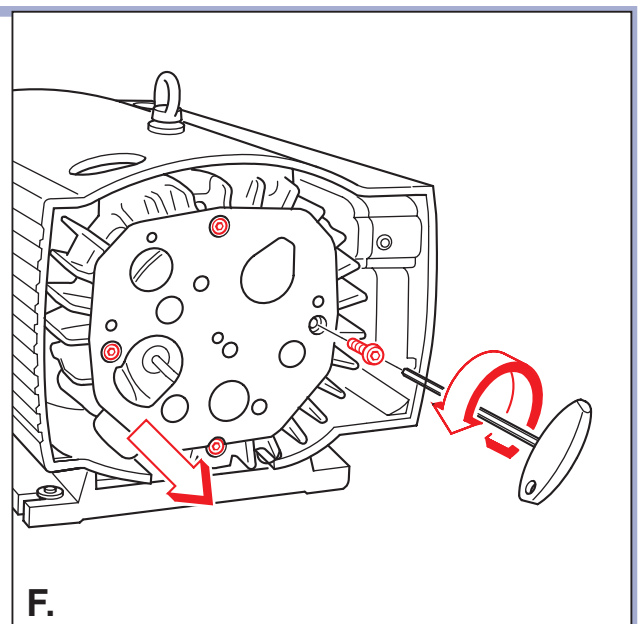

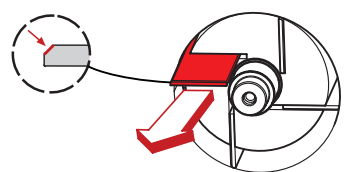		
7500 h		
	$A_{MIN} > 28mm$ $A_{MIN} < 28mm$	
X 4.25DSK → No. 90139900007 (SET)		
G.		

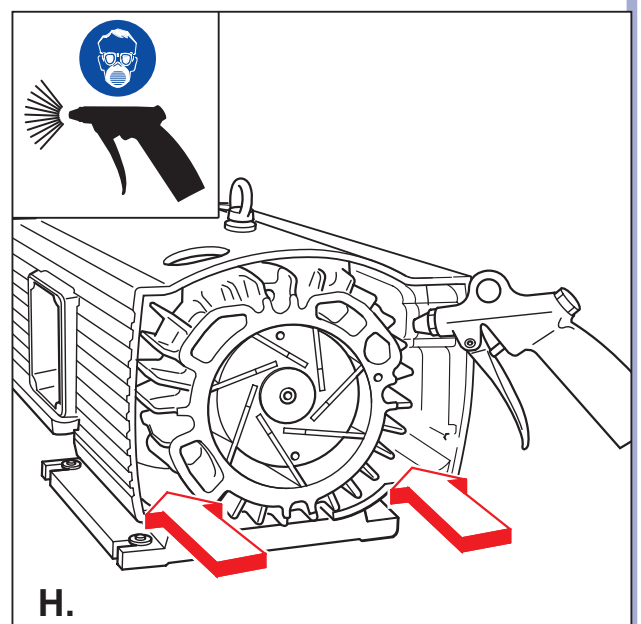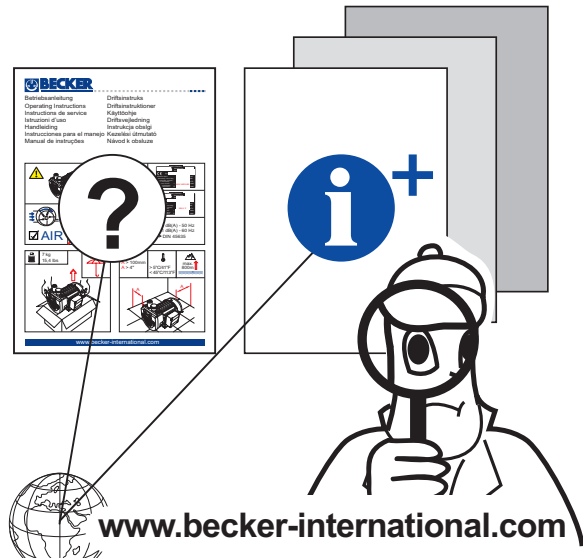www.becker-international.com



Gebr. Becker GmbH
Hölker Feld 29-31
D-42279 Wuppertal
info@becker-international.com



SERVICE
www.becker-international.com
Sales and service network