
DATA SHEET

SV 200/2


SIDE CHANNEL VACUUM PUMPS

double stage
air-cooled

MAKE IT BECKER.

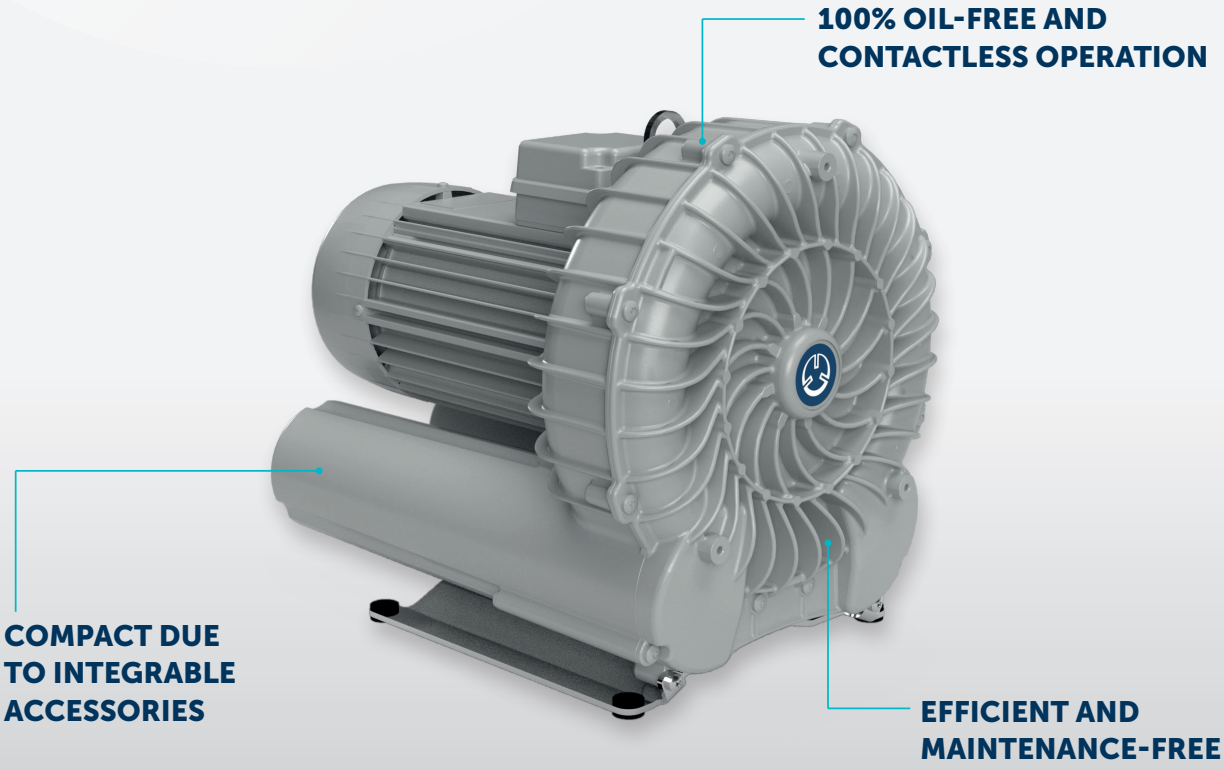


BECKER

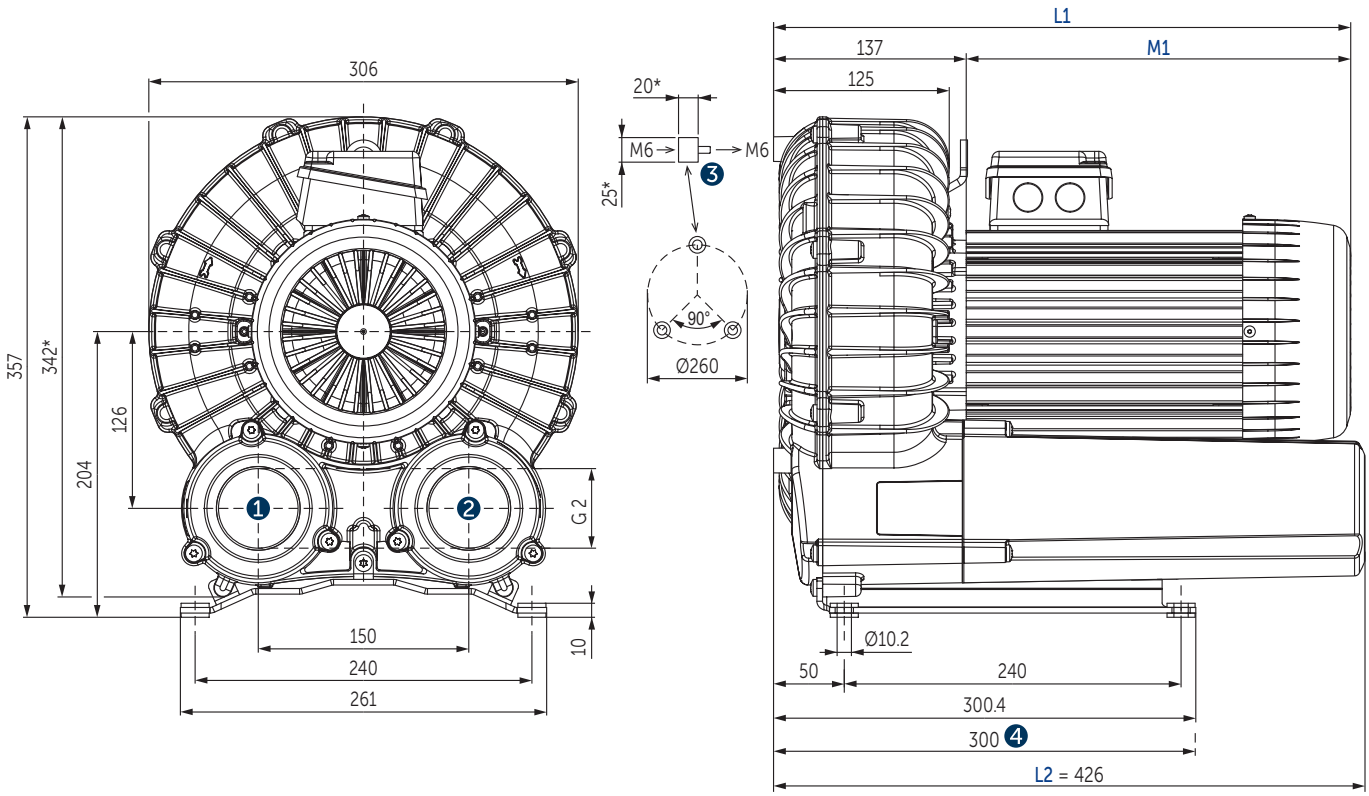

1 Vacuum connection (G2)
2 Pressure connection (G2)
3 Optional vibration dampers (rubber buffers) for vertical installation
4 Optional with shorter silencers
L Blower length L1 with motor and L2 without motor.
L1 and M1 are variable, see separate motor specification sheet. ➝ The total blower length is L1 or L2.
* Device dimensions without pedestal under the silencer, with rubber buffers on the enclosure cover
▪ The motor illustration may vary
▪ Dimensions in mm

Suction air rate		Vacuum relative		Installed motor power		Emission sound pressure level [1]		Weight with motor
m^3/h		mbar		kW		dB(A)		kg
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
90	110	-330	-300	1.1	1.3	63.7 (-230 mbar)	68.4 (-245 mbar)	25.5
90	110	-330	-350	1.5	1.8	63.7 (-230 mbar)	68.4 (-245 mbar)	28.5


[1] According to DIN EN ISO 11203, accuracy class of measurement: class 2, extended measurement uncertainty: 3 dB
1 m distance, at medium load, both connection sides piped

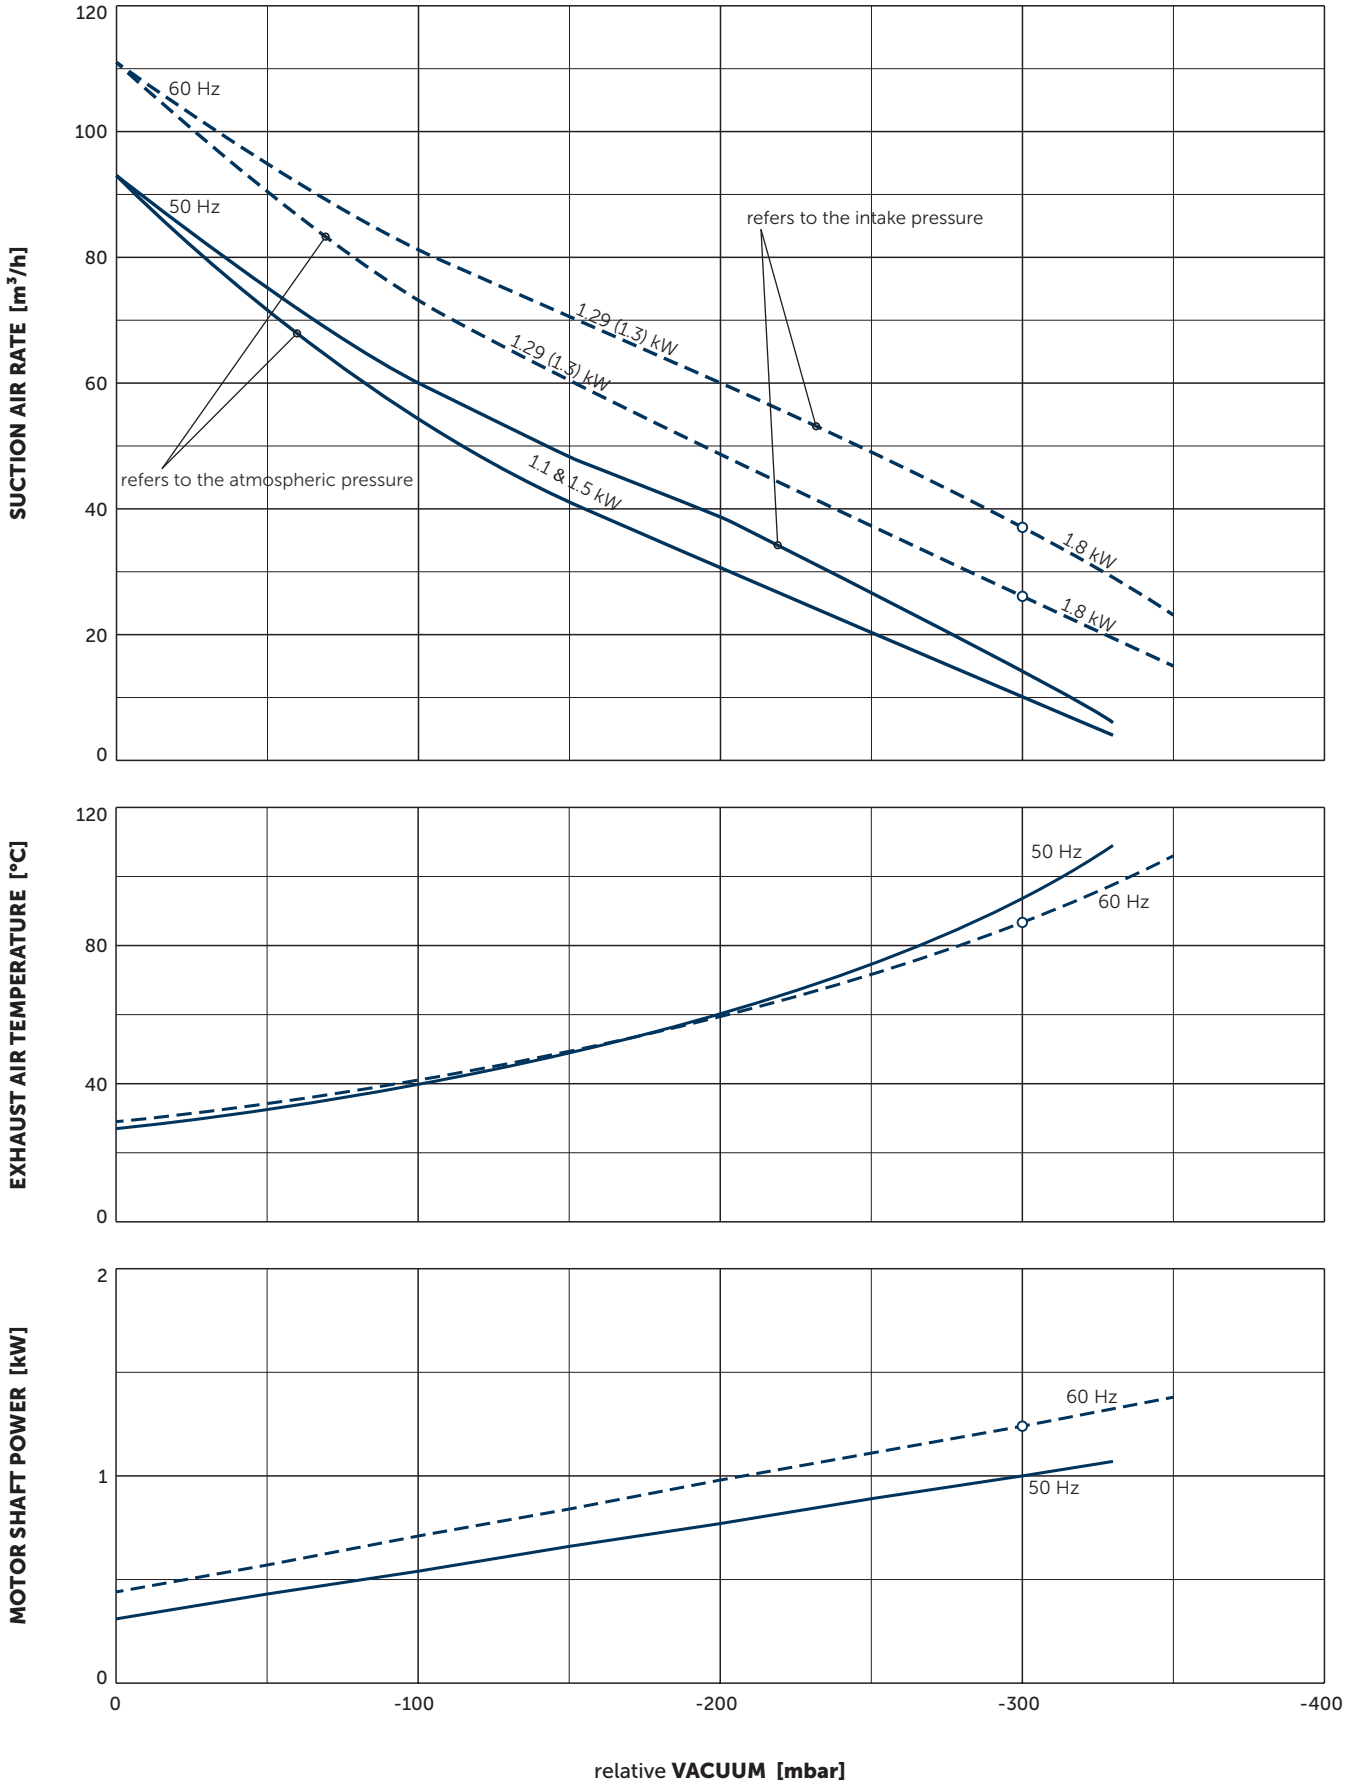

Reference data (atmosphere): 1000 mbar, 20°C
Tolerance: ±10%


VARIANTS AND ACCESSORIES

VACUUM SAFETY VALVE

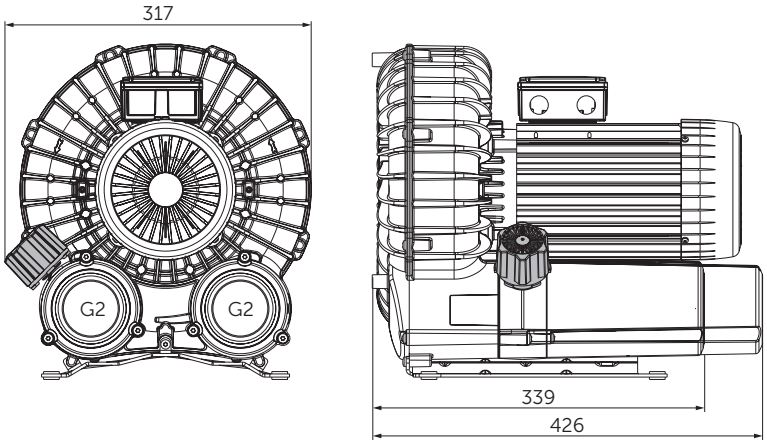

SUCTION FILTER

- Vacuum-sealed filter housing
- Paper or polyester insert
- Can be combined with vacuum safety valve
- Space requirement for filter change approx. 250 mm

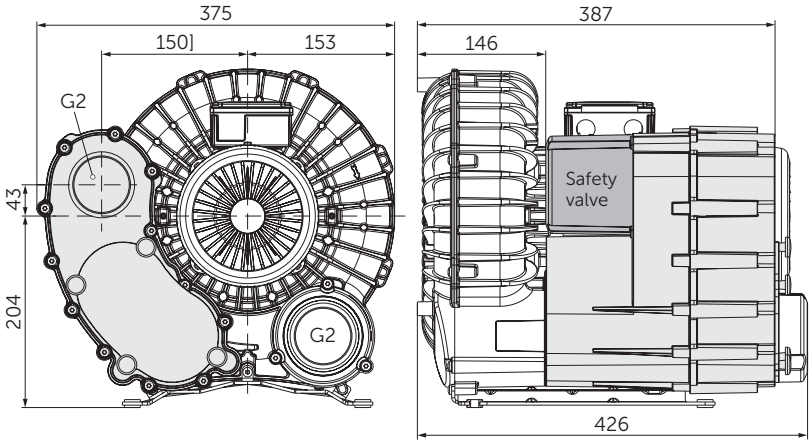

OTHER VARIANTS AND ACCESSORIES

- Without pedestal under the silencers, with rubber buffers on the enclosure cover
- Vacuum/pressure connection G1½ instead G2
- Short or long silencers
- Increased corrosion protection
- External suction filter
- Sound proof box SH 18 [1)]



Sound proof box SH 18

[1)] See separate data sheet
- Dimensions in mm – For other dimensions, see the figure on page 2.
- Possible combinations on request

Right of modification reserved 2023-10-24

MAKE IT BECKER.

HOMEPAGE
SV SERIES

DOWNLOAD
MOTOR SPECS.

ONLINE SHOP
SV 200/2

www.becker-international.com

BECKER