
DATA SHEET

VT 4.4 DC
ROTARY VANE VACUUM PUMPS


oil-free and air-cooled
24V DC drive


MAKE IT BECKER.

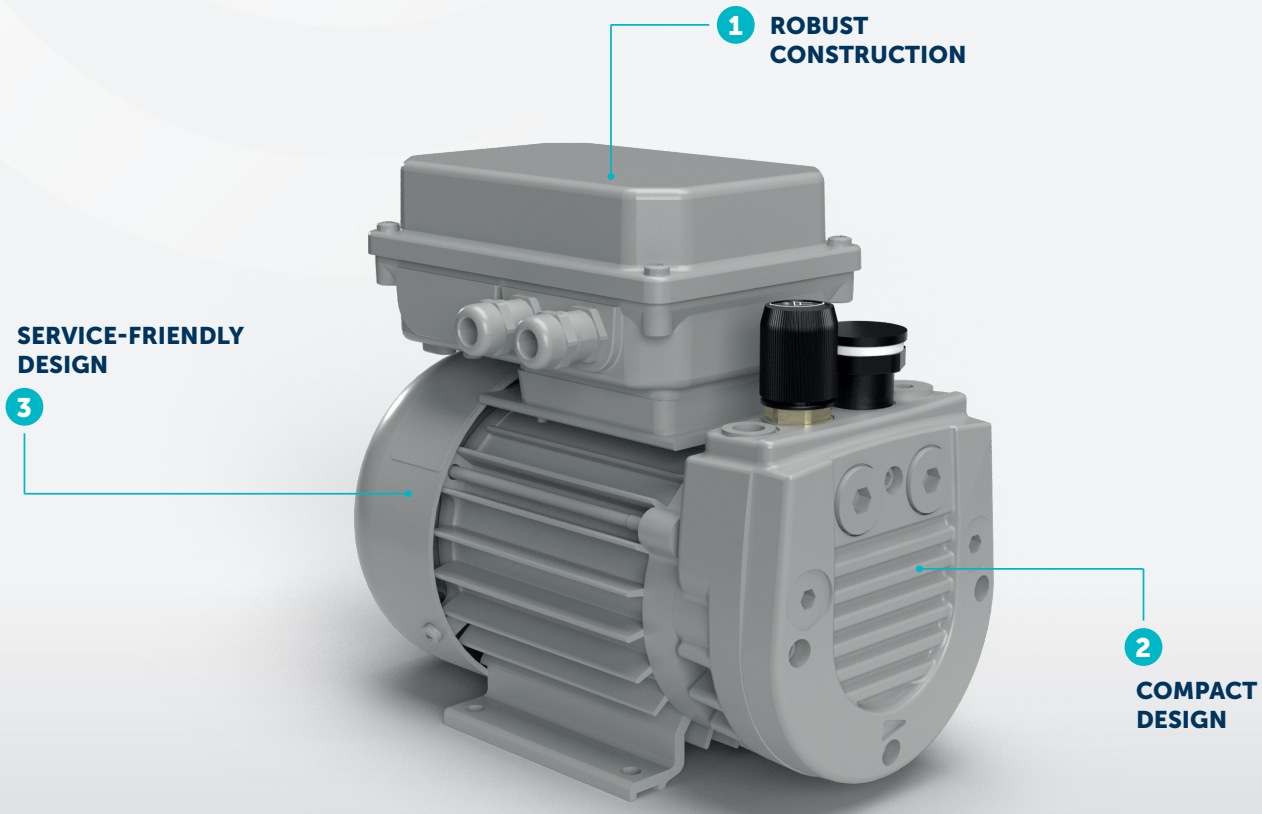


1. Thanks to high-quality construction, VT vacuum pumps are both durable and reliable, suitable for demanding conditions.
2. The direct use of the motor shaft as a rotor shaft results in a particularly compact design, saving space and resulting in simpler machine integration.
3. A service-friendly design allows for easy on-site maintenance, reducing unplanned downtime.

BECKER

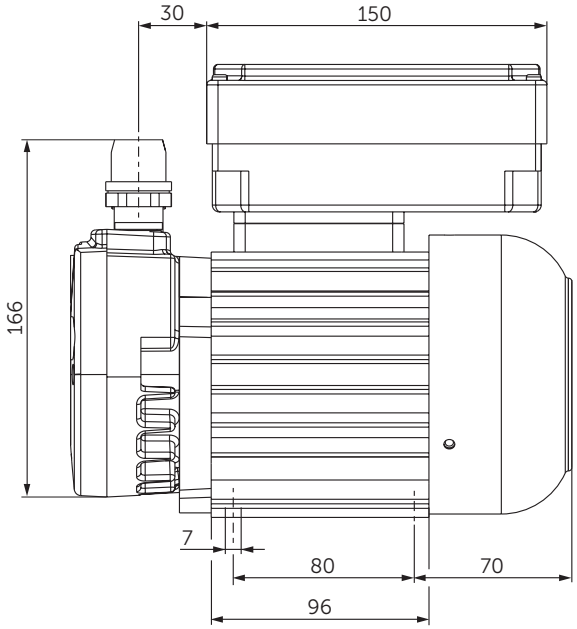

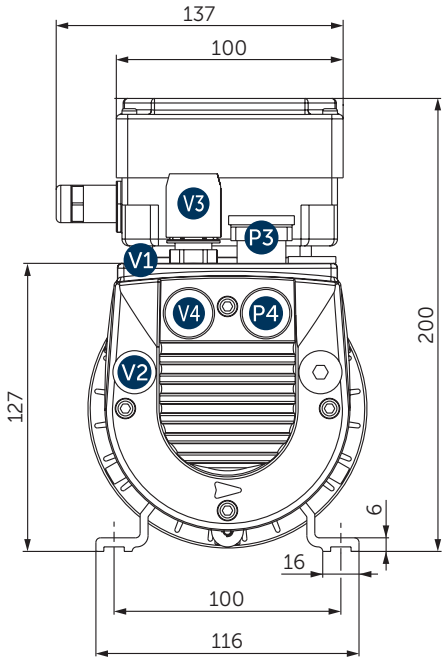

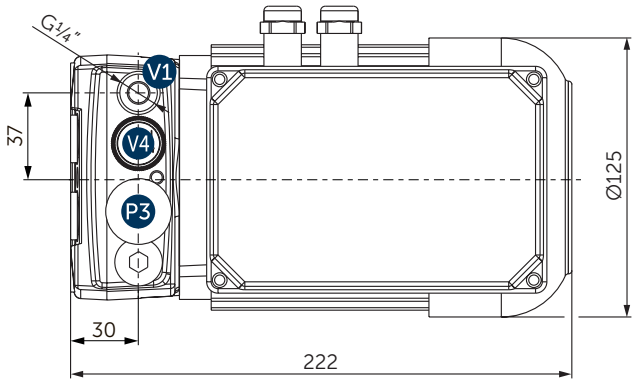


V1 (V2) Vacuum connection (G¼")
V3 (V4) Vacuum regulating valve
P3 (P4) Blow-off valve
(XX) Alternative

- Including integrated suction air filter
- The motor illustration may vary
- Dimensions in mm

Suction air rate	Vacuum absolute	Ⓜ	Emission sound pressure level[1)]	Weight incl. motor
m^3/h max.	mbar max.		dB(A)	kg
4.1	150	250 W • 24 V DC (21-30 V) • max. 3000 min^{-1}	≤60.5	7.5

[1)] According to DIN EN ISO 3744 (KpA = 3 dB(A)), 1 m distance, at medium load, both connection sides piped
- Reference data (atmosphere): 1000 mbar, 20°C; Tolerance: ±10%

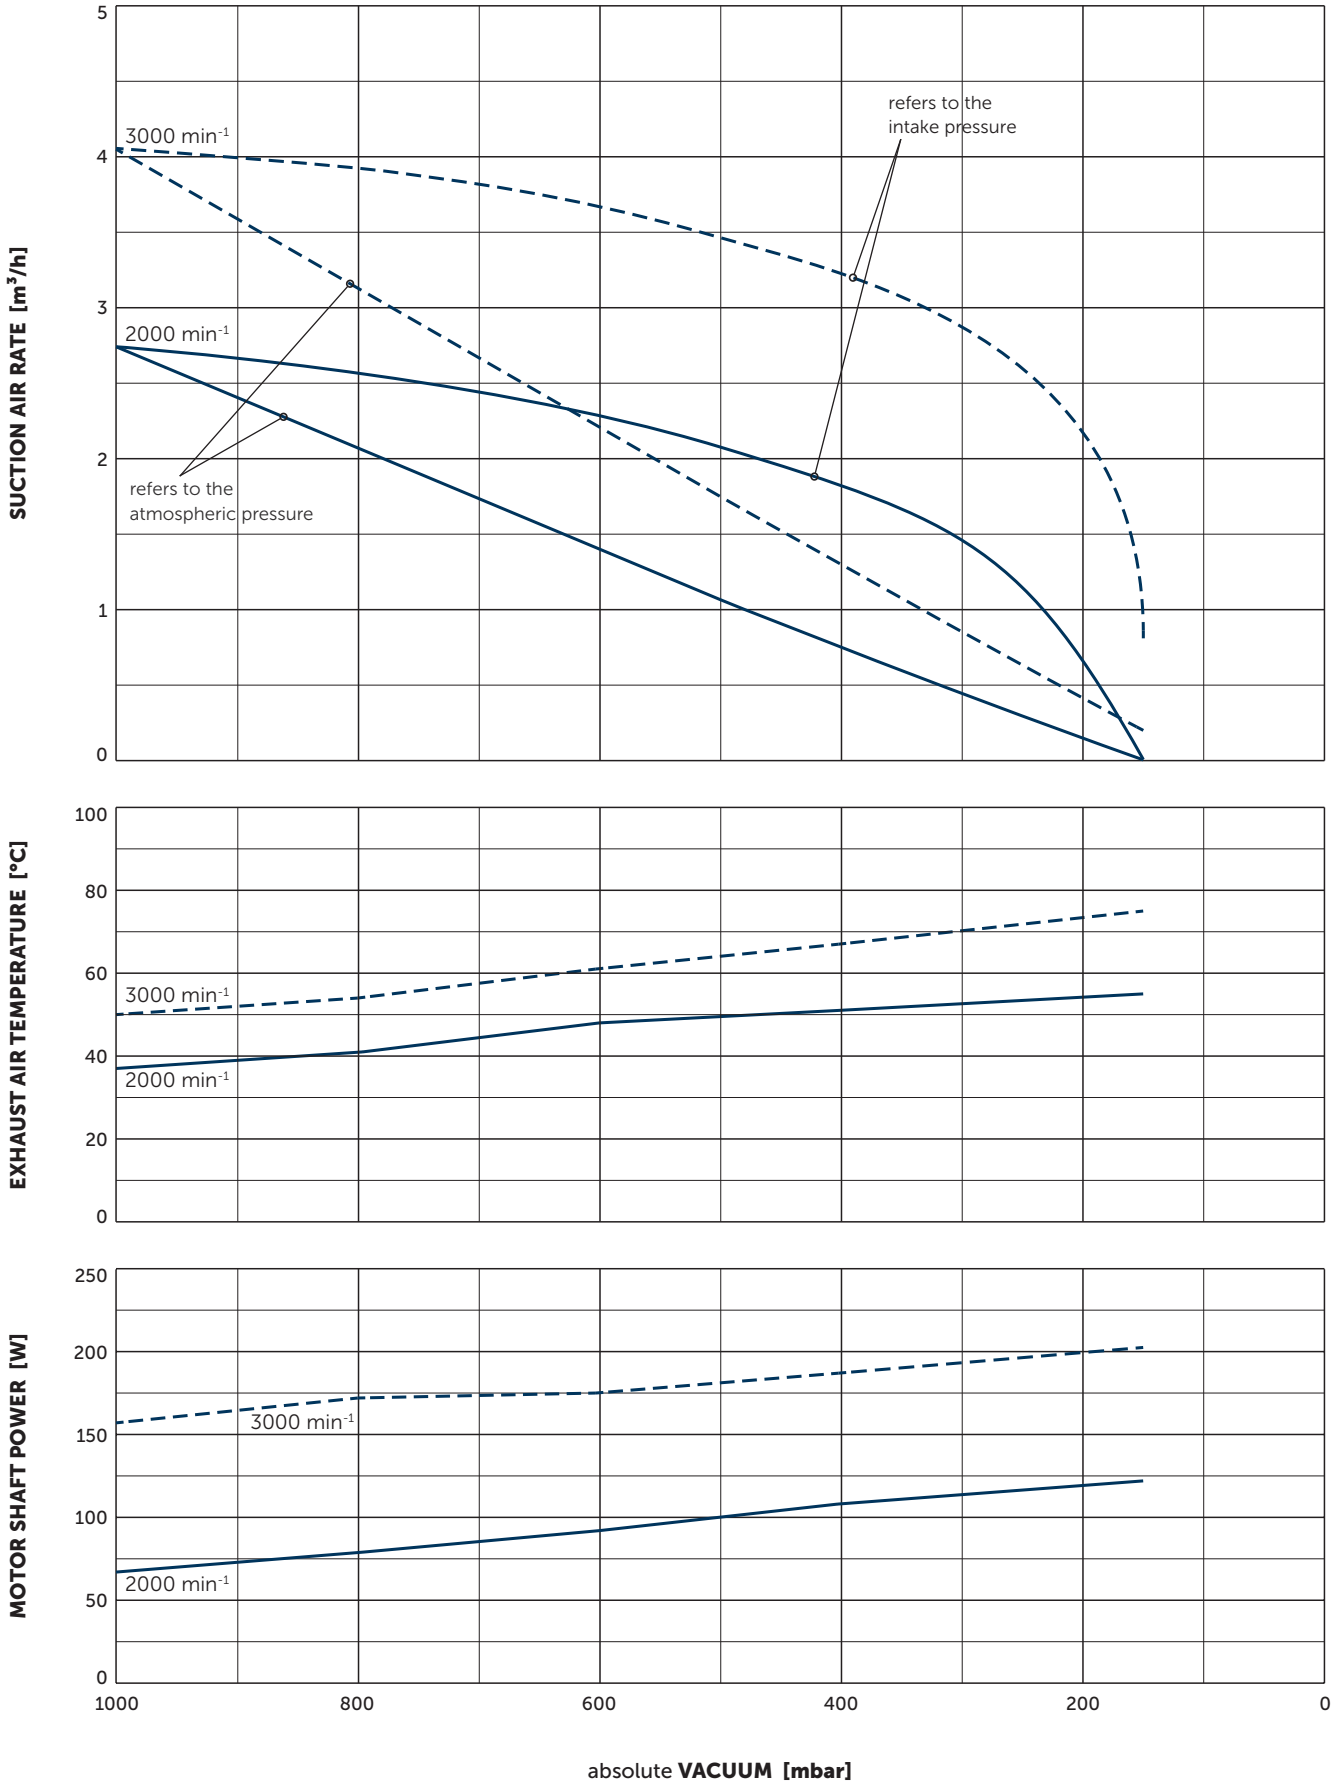

Reference data (atmosphere): 1000 mbar, 20°C
Tolerance: ±10%

Right of modification reserved 2025-10-24

MAKE IT BECKER.