
DATA SHEET

# VT 4.8 DC
# ROTARY VANE VACUUM PUMPS


oil-free and air-cooled
24V DC drive


**MAKE IT BECKER.**

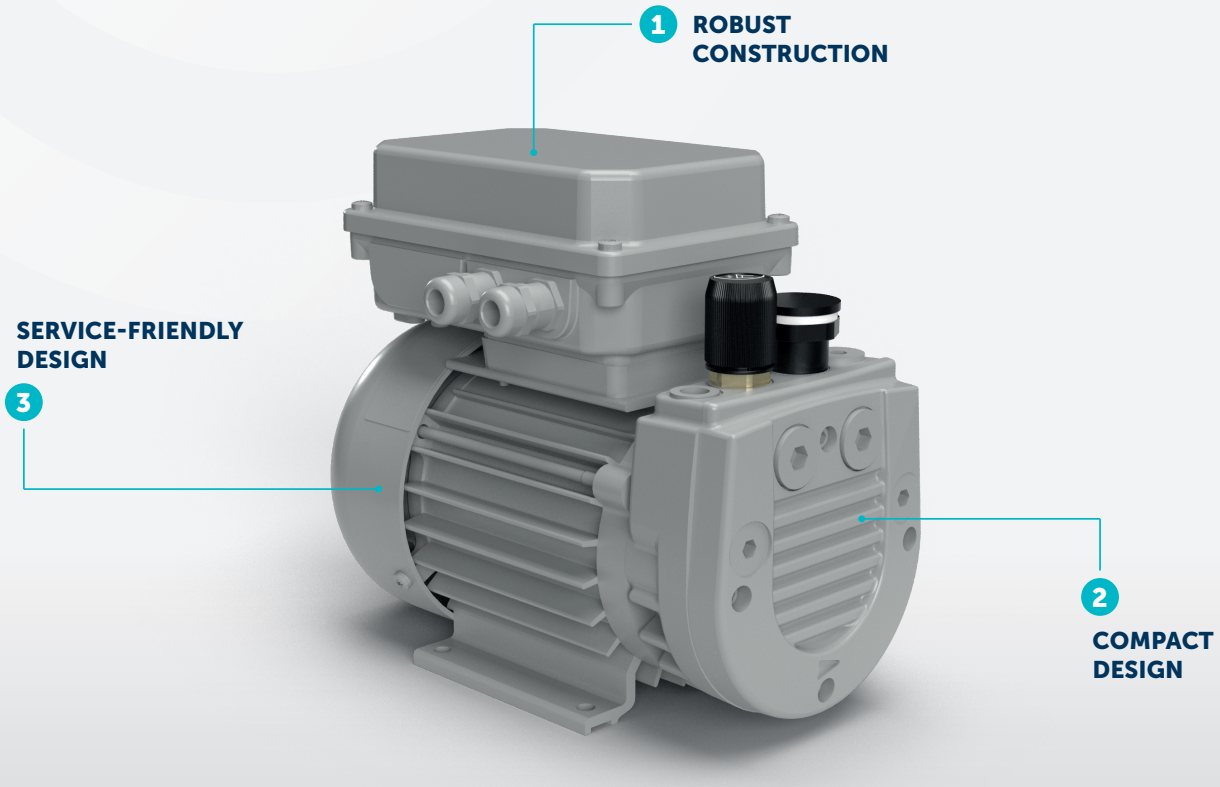



1. Thanks to high-quality construction, VT vacuum pumps are both durable and reliable, making them ideal for demanding conditions.
2. Using the motor shaft directly as the rotor shaft results in an especially compact design, saving space and simplifying machine integration.
3. A service-friendly design allows for easy on-site maintenance, helping reduce unplanned downtime.

BECKER

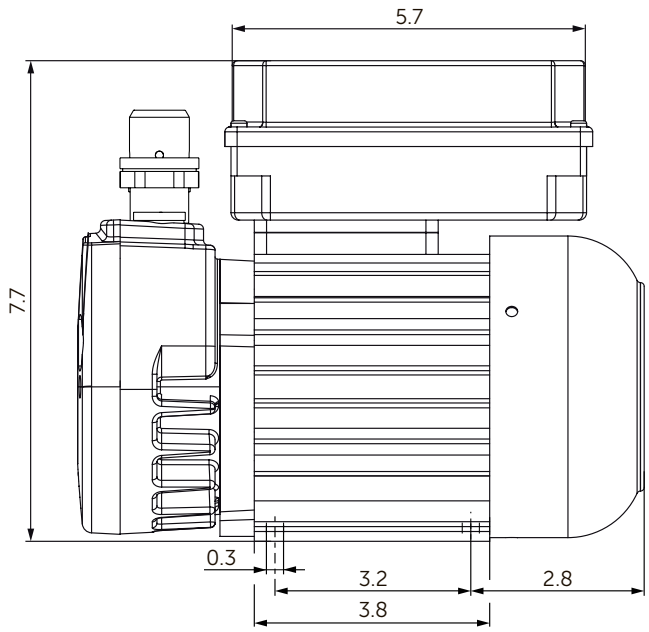

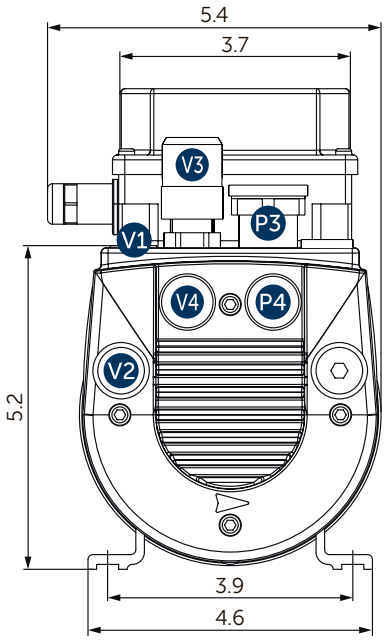


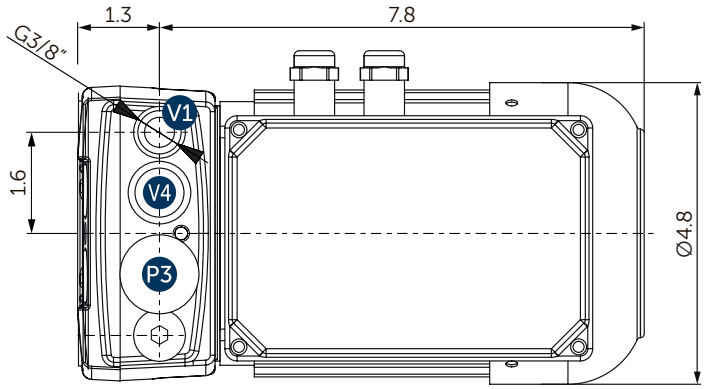

**V1 (V2)** Vacuum connection (G⅜")
**V3 (V4)** Vacuum regulating valve
**P3 (P4)** Blow-off valve
**(XX)** Alternative

- Including integrated suction air filter
- The motor illustration may vary
- Dimensions in inch

| Suction air rate | Vacuum | Ⓜ | Emission sound pressure level[1)] | Weight with motor |
|---|---|---|---|---|
| CFM max. | in. HgV max. | | dB(A) | lbs |
| 5.7 | 25.1 | 0.7 hp • 24-48 V DC +20%/-30% • max. 3600 rpm | ≤60.5 | 26.5 |

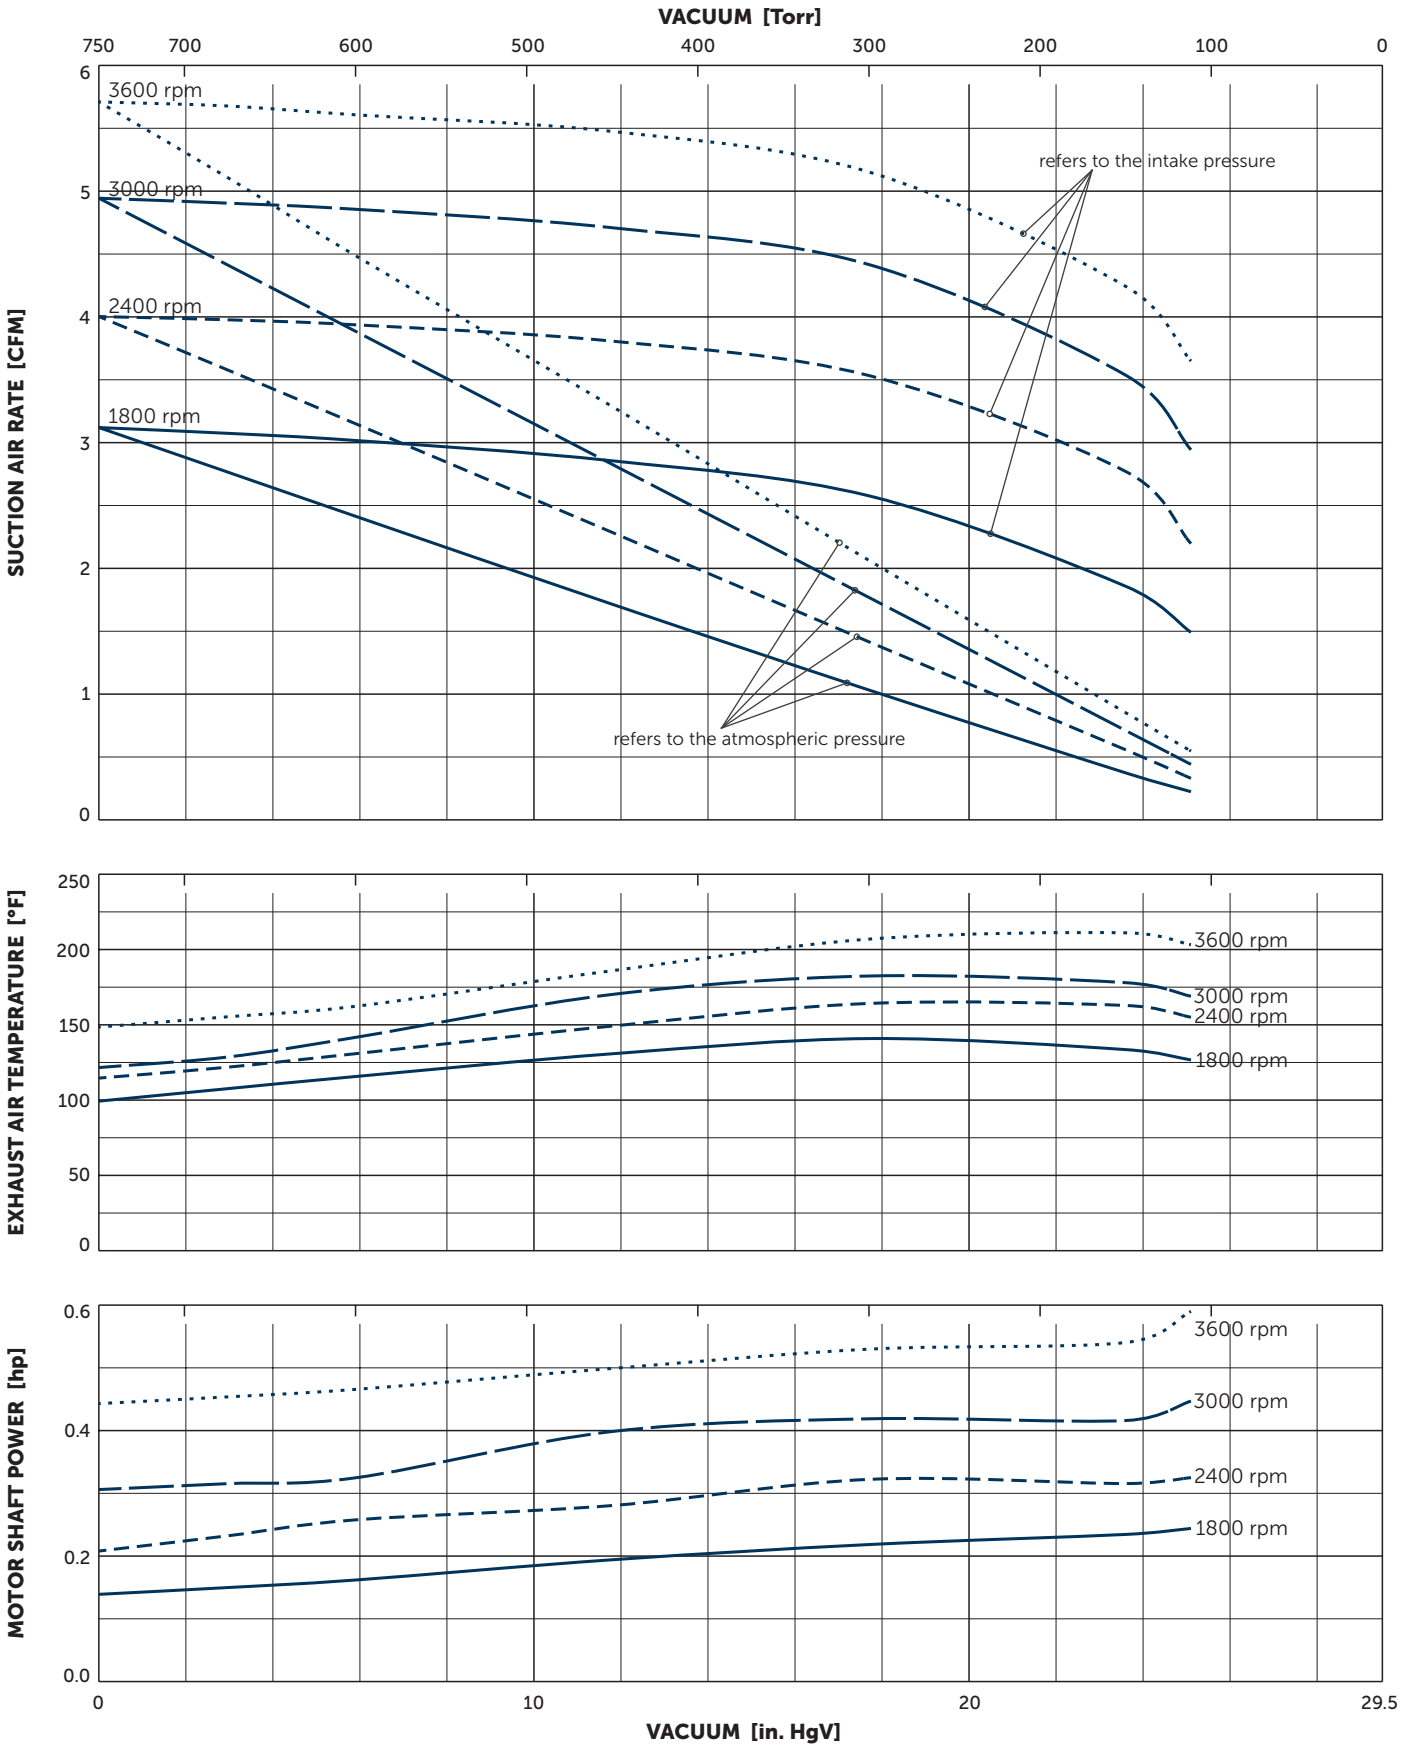[1)] According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped
- Reference data (atmosphere): 750 Torr, 68°F; Tolerance: ±10%




Reference data (atmosphere): 750 Torr, 68°F; Tolerance: ±10%

Right of modification reserved 2025-10-24

# MAKE IT BECKER.

www.beckerpumps.com
www.becker-international.com
www.becker-international-shop.com

BECKER