
DATA SHEET

VTLF 2.250
ROTARY VANE VACUUM PUMPS


oil-free
air-cooled


MAKE IT BECKER.

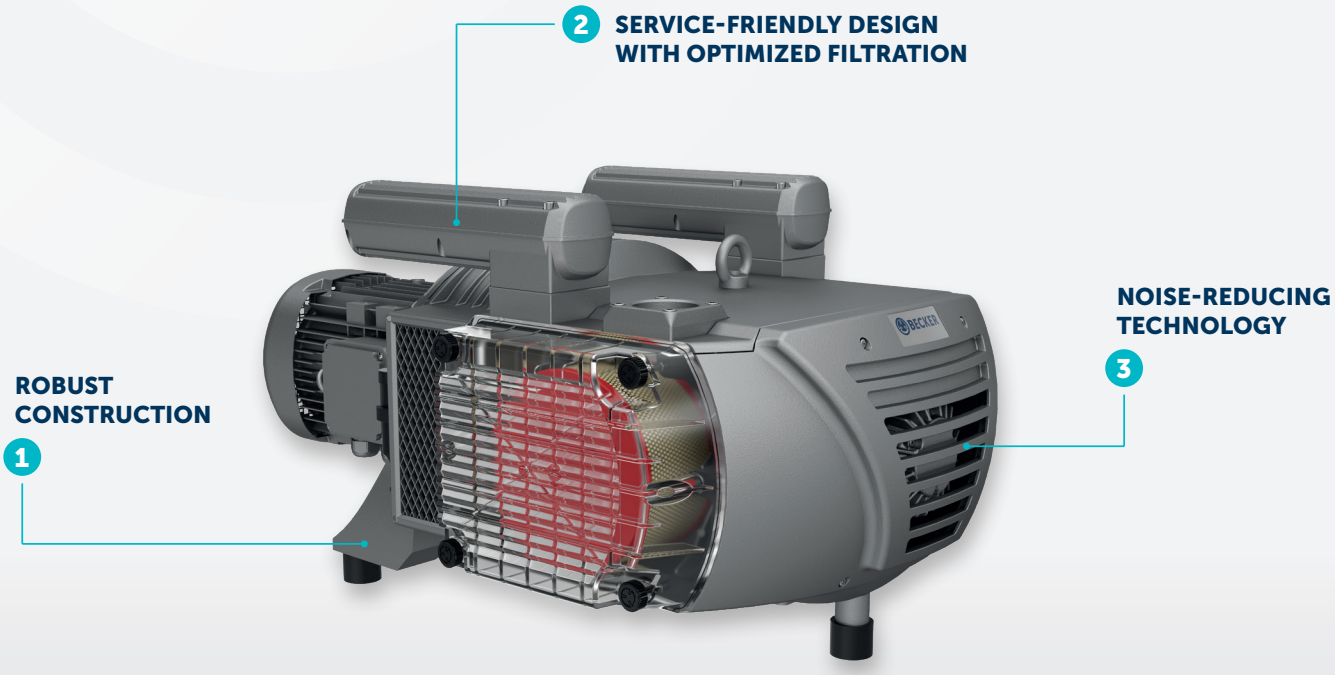


1. Thanks to high-quality construction, vacuum pumps are both durable and reliable, suitable for demanding conditions.
2. The transparent filter cover makes it easy to spot contamination, while the larger filter surface extends the time between replacement intervals. With simple, on-site maintenance, downtime is minimized.
3. Effective noise-reducing features help lower noise levels, contributing to a more pleasant working environment.

BECKER

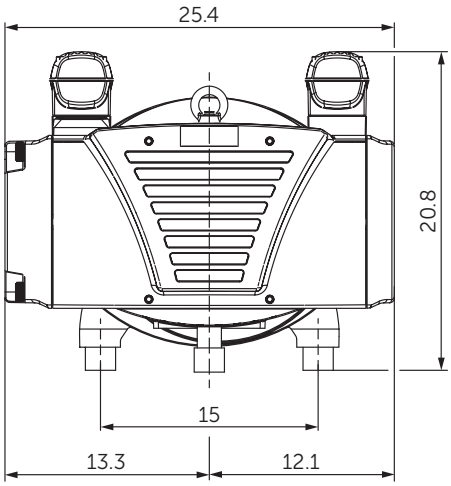

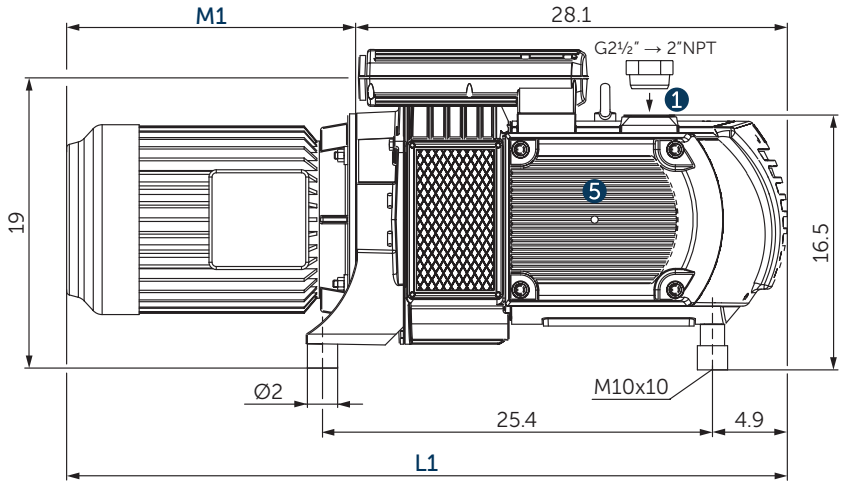

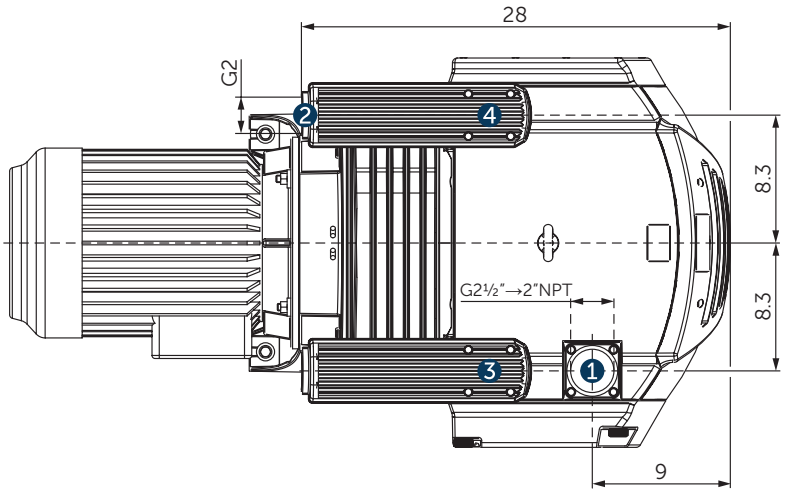


1 Vacuum connection, for the US market including adapter 2½" BSPP to 2" NPT thread
2 Exhaust air connection (G2")
3 Vacuum relief valve with silencer
4 Blow-off valve with silencer
5 Suction filter
L Overall device length L1 with motor. L1 and M1 are variable, see motor specification sheet.

- The motor illustration may vary.
- Dimensions in inch

Suction air rate		Vacuum		Installed motor power		Emission sound pressure level [1]		Weight w/o motor
CFM		in. HgV		hp		dB(A)		lbs
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
144	169	23.6	23.6	7.4	8.9-10.0	77	79	333

[1] According to DIN EN ISO 3744 (KpA = 3 dB(A)), 39.4 inch distance, at medium load, both connection sides piped

- Reference data (atmosphere): 750 Torr, 68°F; Tolerance: ±5%

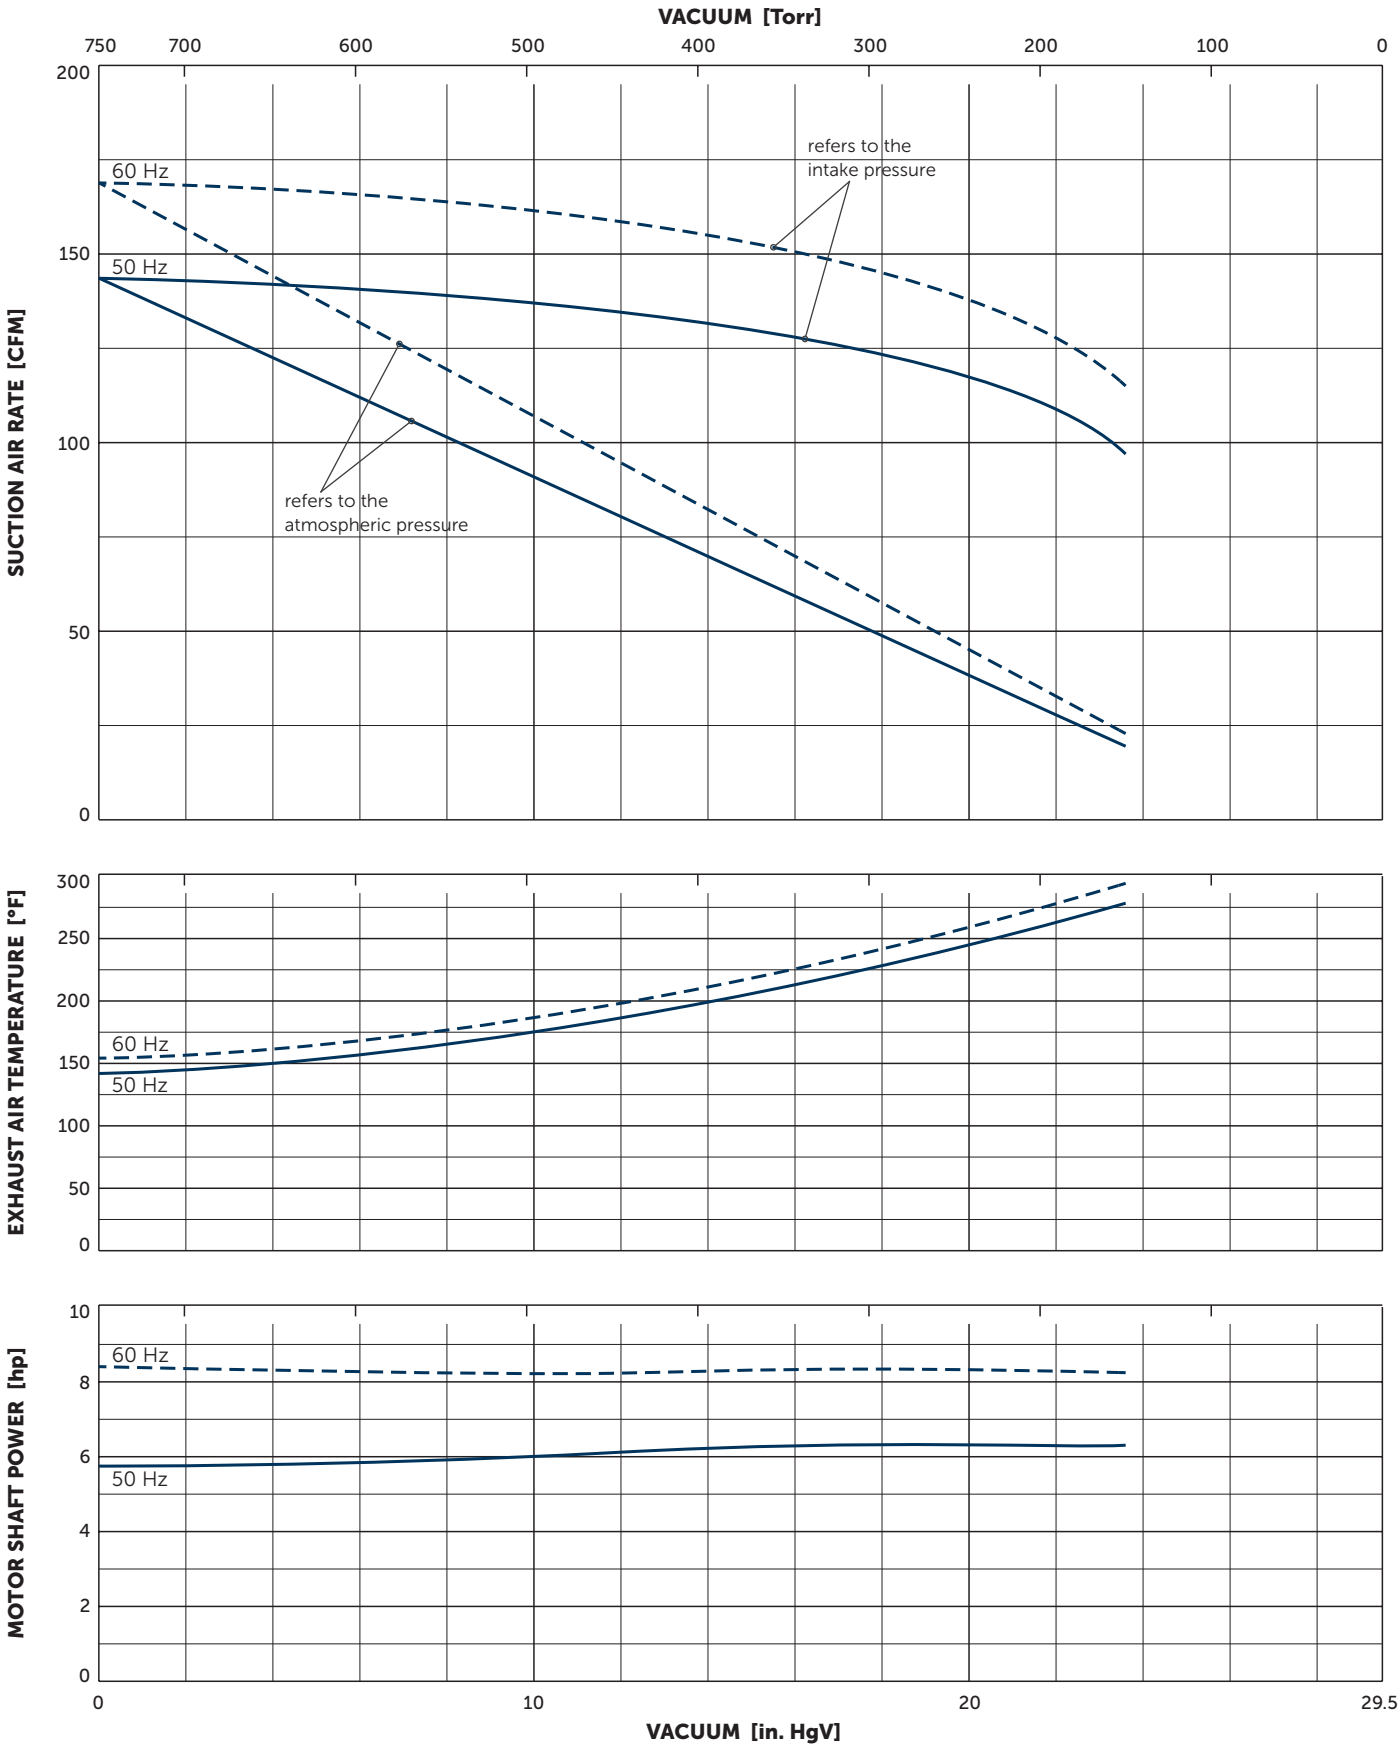

Reference data (atmosphere): 750 Torr, 68°F; Tolerance: ±5%

VARIANTS AND ACCESSORIES

VXLF 2.250

SERIES X: BECKER INNOVATION WITH TOP WARRANTY

Equipped with specially developed vanes, these oil-free rotary vane pumps distinguish themselves by high abrasion resistance, and with that extremely long service lives. Due to the low wear there is also minimal dust, so the series X pumps are perfectly suited for precision processes under clean room conditions.

This innovation branded by Becker is outstanding not only because of its 100 percent oil-free operation, excellent degree of efficiency and low power consumption.

In the area of sensitive vacuum, series X also guarantees precise low-pulsation air conduction.

Becker guarantees for these pumps a vane life-time of 20,000 operating hours or a maximum of 3 years. The enhanced longevity of X series pumps also extends service life intervals, and can cut out the need for frequent service visits with costly pump failures now no longer an issue.

ADVANTAGES

- Quick, clean and quiet
- Oil-free
- Wear resistant
- Energy saving
- Long-life reliability

OTHER VARIANTS AND ACCESSORIES

- **VARIAIR VTLF 2.250/0-400** with frequency inverter [1)]
- Integrated non return valve
- Increased corrosion protection
- External suction filter [1)]
- Sound proof box SH 10 [1)]

VARIAIR UNIT



VARIAIR VTLF 2.250/0-400



Example for an external suction filter



Sound proof box SH 10

[1)] See separate data sheet
- Possible combinations on request

Right of modification reserved 2025-09-05

MAKE IT BECKER.

MOTOR
SPECIFICATIONS

www.beckerpumps.com
www.becker-international.com
www.becker-international-shop.com

BECKER